


Our Spira-Strip gasket includes a solid silicone elastomer to surface mount the gasket and provide an environmental seal if needed. The standard configuration (shown below) includes a Spira-Shield gasket. See *Options* to specify a different spiral material as desired.

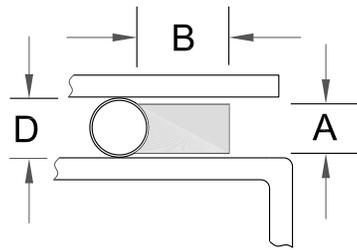

*Spiral on solid silicone elastomer.*

*See page 55 for surface mounting information.*

Gasket Dimensions				Spira-Strip Part Numbers (Spira-Shield Gasket)		
Elastomer Thickness (A)	Elastomer Width (B)	Spiral Diameter (D)	Total Gasket Width	Standard Force*	Moderate Force	Low Force
.063"	.250"	.078"	.328"	SS-0522 /S	MS-0522 /S	LS-0522 /S
	.375"		.453"	SS-0523 /S	MS-0523 /S	LS-0523 /S
	.500"		.578"	SS-0524 /S	MS-0524 /S	LS-0524 /S
	.625"		.703"	SS-0525 /S	MS-0525 /S	LS-0525 /S
.094"	.250"	.109"	.359"	SS-0732 /S	MS-0732 /S	LS-0732 /S
	.375"		.484"	SS-0733 /S	MS-0733 /S	LS-0733 /S
	.500"		.609"	SS-0734 /S	MS-0734 /S	LS-0734 /S
	.625"		.734"	SS-0735 /S	MS-0735 /S	LS-0735 /S
.125"	.250"	.156"	.406"	SS-1042 /S	MS-1042 /S	LS-1042 /S
	.375"		.531"	SS-1043 /S	MS-1043 /S	LS-1043 /S
	.500"		.656"	SS-1044 /S	MS-1044 /S	LS-1044 /S
	.625"		.781"	SS-1045 /S	MS-1045 /S	LS-1045 /S

Moderate and low force gaskets come with a cord unless specified otherwise. (See *Options*).

\*All standard force gaskets come without a cord.

## Application Information

This gasket is made by attaching our Spira-Shield to a solid silicone elastomer which holds the spiral in place. The elastomer can be used to achieve an environmental seal of up to one atmosphere! This gasket can also be made into a custom Framed Gasket to your specifications. (See page 38).

### Materials

See page 59 for material specifications.

**Spiral:** Spira-Shield, Tin/lead plated beryllium copper. (See *Options* for others).

**Cord:** 80 durometer PVC (hard plastic).

**Elastomer:** 40 durometer solid silicone rubber.

### Shielding Quality

This gasket offers shielding quality from 86 dB to 165 dB. The shielding quality may vary depending on your specific application. Refer to page 48 for more complete performance data.

## Compression Force

Spira-Strip gaskets come in three different resiliencies (as shown below). Optimal compression of the gasket is 25% of the diameter of the spiral. The compression forces shown are approximate.

**Standard Force:** ~30 pounds per linear inch compression.

**Moderate Force:** ~10 pounds per linear inch compression.

**Low Force:** ~1.5 pounds per linear inch compression.

**Note:** The force to achieve an environmental seal is significantly greater than that required for the EMI seal.

## Mounting

See page 55 for surface mounting information.

This gasket is surface mounted and held in place either by punching holes in the elastomer and securing it with fasteners or by gluing the elastomer using an RTV adhesive. When using glue, take care to keep it off the spiral!

## Available Options

### Spiral Material

Specify a different spiral material by choosing the desired prefix from the table.

Example:  
**TNL-0523 NC /S**  
Spira-Strip with Ultra Quick-Shield Gasket Low Force, No Cord

See page 60 for material compatibility information.

	Spira-Shield	Quick & Ultra Quick-Shield	Flexi-Shield	
Spiral:	Tin Plated BC	St. Steel	Tin Plated BC	St. Steel
<b>Standard: Tin/Lead or No Plating</b>	SS (default) MS LS	NI NM NL	ST MT LT	SQ MQ LQ
<b>Tin/Lead or Edge Plating Option (T or E)</b>	ESS EMS ELS	TNI TNM TNL	EST EMT ELT	TSQ TMQ TLQ
<b>RoHS Tin Plating Option (IW)</b>	IWSS IWMS IWLS	IWNI IWNM IWNL	IWST IWMT IWLT	IWSQ IWMQ IWLQ
<b>RoHS Edge Tin Plating Option (EIW)</b>	EIWSS EIWMS EIWLS	--	EIWST EIWMT EIWLT	--

### Cord Insert

Standard Force gaskets come without a cord and we recommend to omit the cord in all gaskets by specifying "NC" (no cord). Cord is available if needed in PVC, solid fluorosilicone, solid silicone and thermal plastic rubber depending on the size and should be ordered to match the elastomer chosen. Please contact us for details.  
**NC:** No Cord (Example: **MS-1043 NC /S**)

### Special Elastomer

Spira-Strip gaskets come with a solid silicone elastomer. A solid fluorosilicone elastomer is available on special request.\* (For sponge elastomers, please see the Quick-Strip gasket on page 17). Cord will match elastomer choice if included.

### Adhesive Backing

Some sizes can be configured with an adhesive tape backing for easy attachment. Please contact us for details.

## Ordering Information

Spira-Strip is sold by the foot and typically packaged on cardboard flats except in small quantities. It can also be ordered cut-to-length in specific sizes or you can cut it yourself using a sharp pair of scissors. Not all configurations are stock items. Contact us for availability.